

Polycolour FR Notice Boards

Polycolour FR

Polycolour FR noticeboards are acoustically absorbent panels with a felt like finish. They are made from 100% PET plastic which depending on the colour, contain up to 90% post-consumer material. Polycolour FR are also recyclable in the PET waste stream.

Polycolour FR can be installed on walls and ceilings, in office furniture systems, as decorative tiles and even finished products. It is tackable for a multipurpose solution in office spaces and educational facilities.

Panel sizing

9mm: 9mm x 1220 mm x 2420mm



Fire Rating

Polycolour FR is Class B fire rated by the ASTM E84 test.

Acoustic Material

Polycolour FR can be an acoustic wall covering as well as a pinnable surface, making it an ideal building option for interior finishes.


View our full range at www.accessdisplays.co.uk or call us on 01793 613088 for more information

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance.

Polycolour FR Notice Boards

Handling and storage guidelines

- Carefully inspect all material at time of delivery and note any obvious damage on the delivery receipt
- Store Polycolour FR sheets horizontally with support under full sheets
- Keep Polycolour FR as clean as possible during storage. Both sides of the panel should be kept from grease, wax, dust and chips that could leave an impression
- Store Polycolour FR indoors, in a dry cool, well ventilated area
- Avoid exposure to heat 65°C or greater
- Keep table tops clean to avoid scratching the sheets
- Before cutting the sheets. inspect the whole sheet for defects then recover for protection during fabrication
- Wear clean gloves when handling the sheets
- Do not store Polycolour FR near radiators, steam pipe or in direct sunlight.

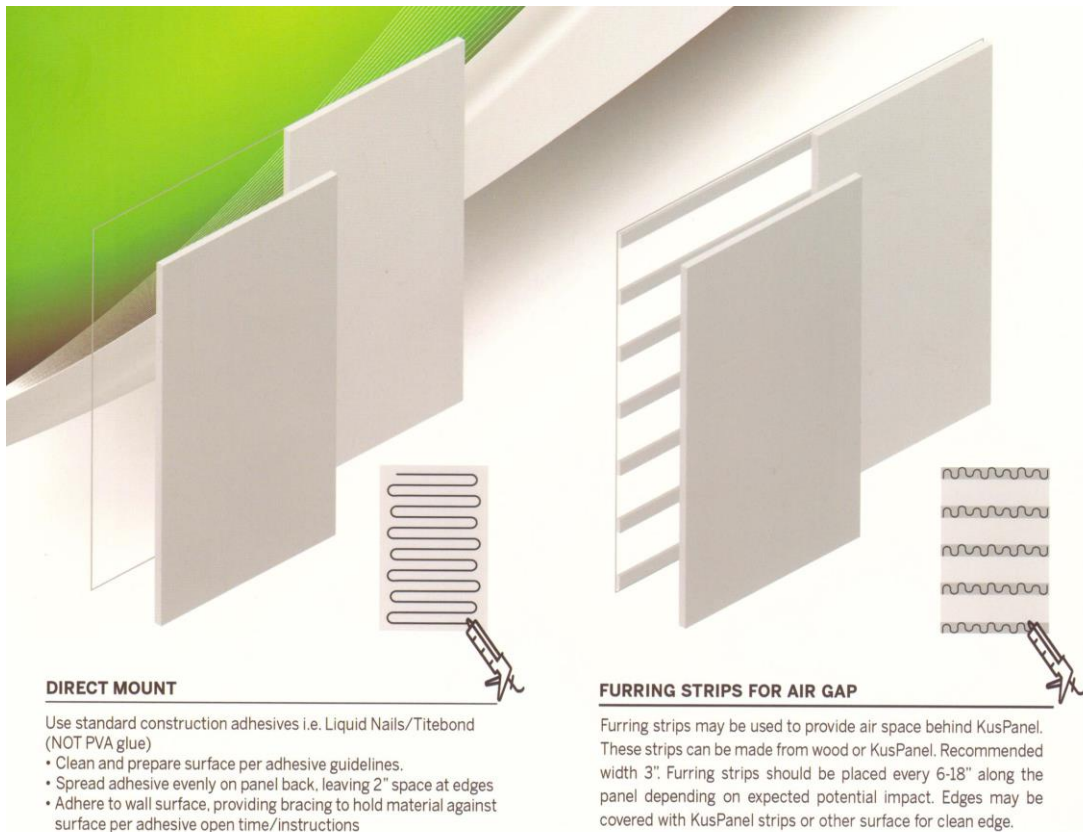

View our full range at www.accessdisplays.co.uk or call us on 01793 613088 for more information

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance.

Polycolour FR Notice Boards

Cleaning and care

Remove dust and dirt by dusting, vacuuming or with a soft, damp cloth and blot dry. Spot cleaner has been used with success when the board has been lightly soiled.

Fixing Instructions

- Clean all surfaces prior to fastening
- Drill holes minimum 15mm centre offset from each corner and slightly oversized to allow for thermal expansion and contraction
- Ensure drilled holes have smooth edges
- Use washers for better load distribution and to prevent pull through
- Use metal inserts if frequent assembly/reassembly is required
- Nails or screws should be fastened into battens or suitable substrates
- Don't over tighten fasteners to avoid denting or pillowing the surface
- Don't use self-tapping screws to hang large panels.

Adhesives

Polycolour FR may be mounted to walls with adhesives, double-sided tape or hook and loop removable products. There are many options with using adhesives; however, these leave some residue on the colourboard that must be removed when recycling the panels.

View our full range at www.accessdisplays.co.uk or call us on 01793 613088 for more information

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance.